saige

ENGINEERED FOR THE OUTDOORS

INSTALLATION QUICK GUIDE

RETRO FIT FENCING

RETRO FIT FENCING INSTALLATION QUICK GUIDE

Tools & Safety Information

No specialist tools are required when working with Saige composite products. However for the best results, we recommend using carbide tipped blades when using a mitre saw, we recommend a 10”-12” saw blade with 30 teeth or less. Saw blades with fewer teeth stay cooler and last longer.

If using a power tool, we advise to adjust the tool so that the screws are not over tightened. Take normal safety precautions when working with timber products. Wear gloves to avoid splinters and a nose and mouth mask when cutting to avoid the inhalation of dust.

Always wear goggles (and ear protection) when using circular saws, drills or sanders and always use an RCD device when using any power tools outside.

Tools you may required:

Mitre Saw


Drill/Driver

Phillips Screw driver

Tape Measure

Hammer

Pencil

Drill bit

Spirit Level

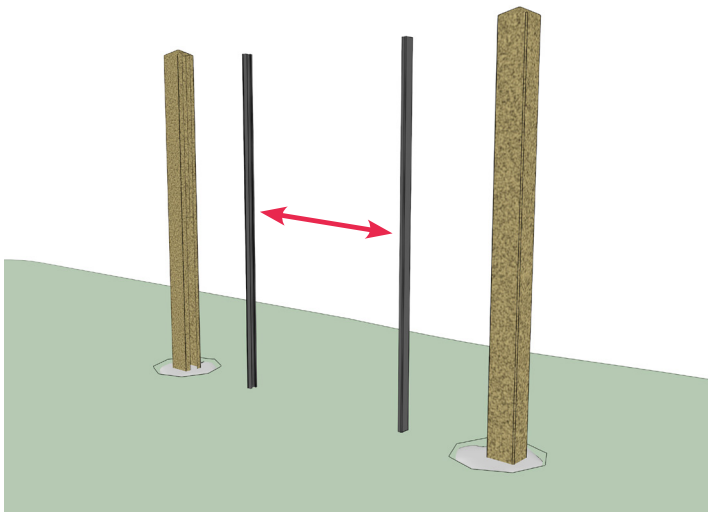

1. Attach retro fit channel by installing into concrete post channels.

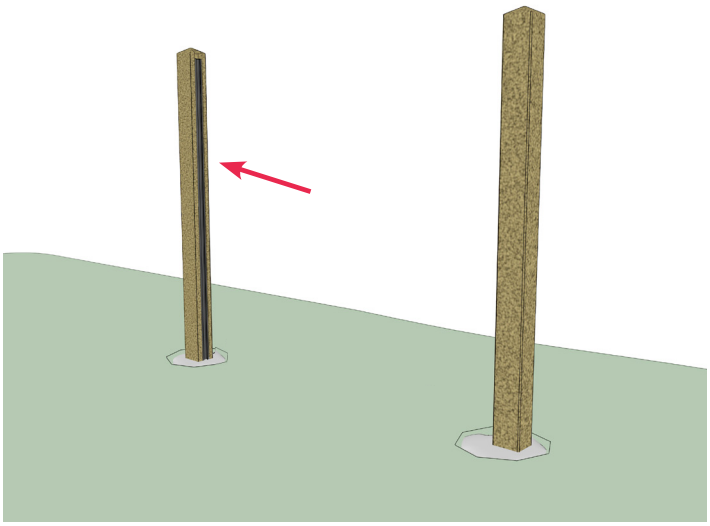

2.The post channel must be fixed to the post

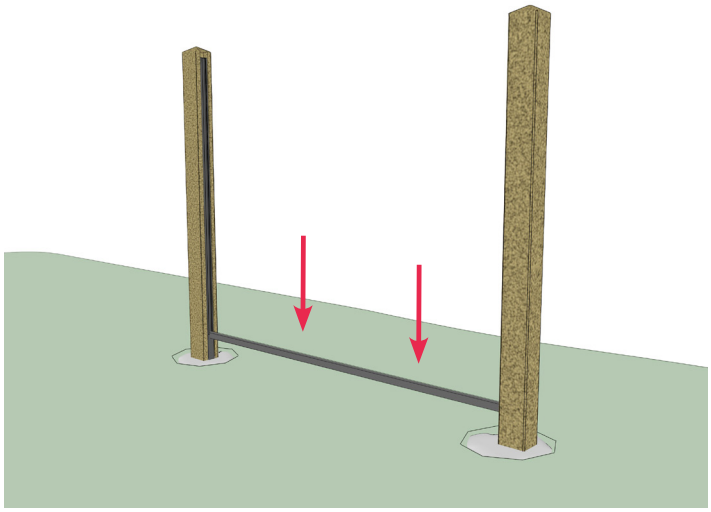

3. insert bottom rail

RETRO FIT INSTALLATION QUICK GUIDE

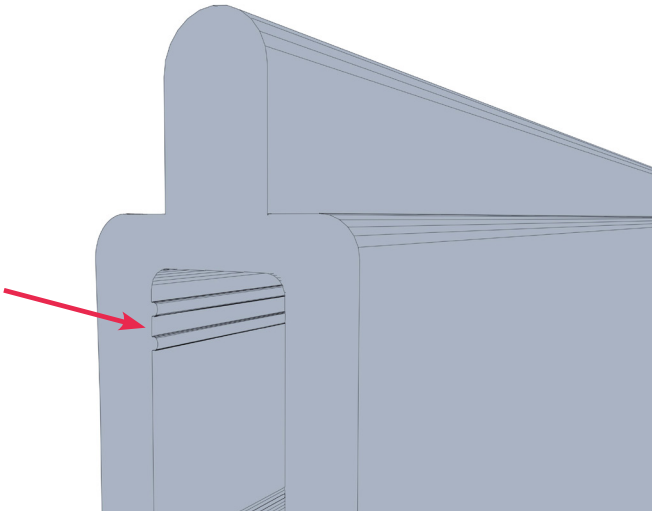

4. When inserting the fencing panels make sure they are all front facing. The front can be identified by ensuring the two raised notches on the inside of the top cutout are facing forwards.

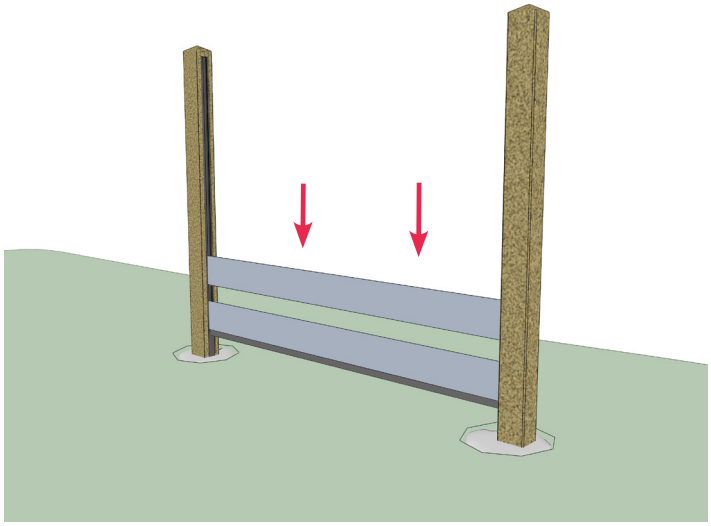

5. Insert fencing panel boards.

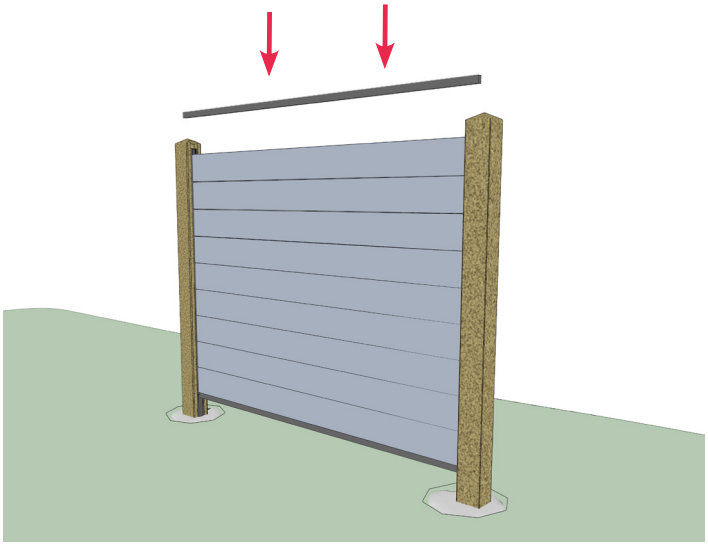

6. Insert top rail.

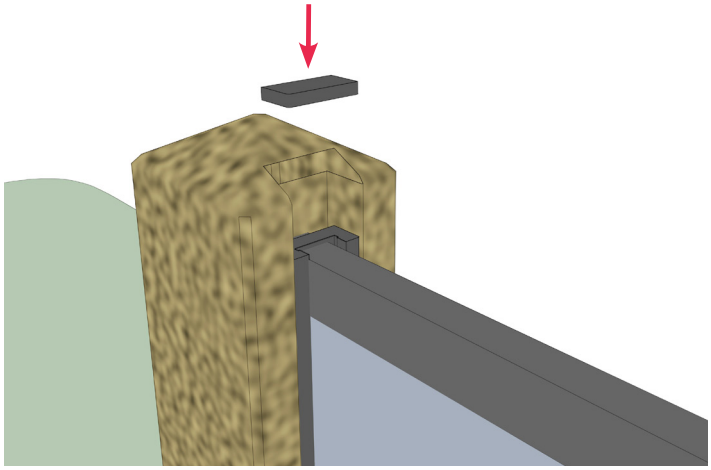

7. Attach post cap to top of retro fit post.

RECYCLED MATERIALS SPLINTER FREE BRITISH DESIGN ANTI-SLIP
100% QUALITY INSPECTED LOW MAINTAENANCE FIRE-RESISTANT OPTIONS

SUBFRAME • DECKING
FENCING • GATES • BALUSTRADE

Scan here to find out more

RETRO FIT INSTALLATION QUICK GUIDE

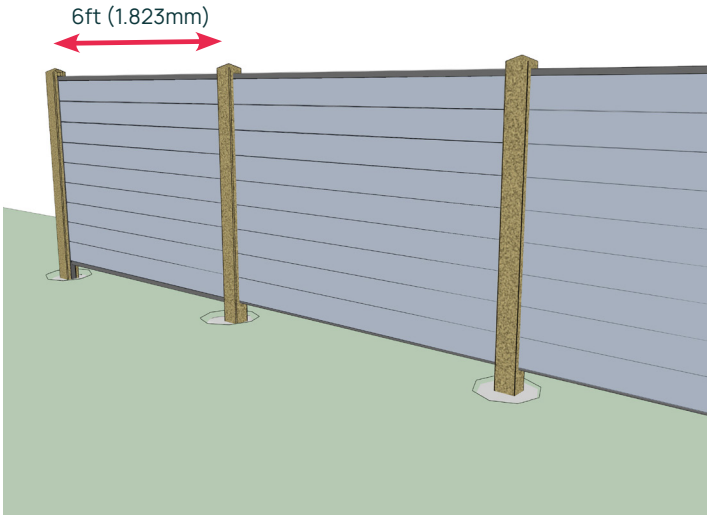

8. Step and repeat.
Note: If using on top of existing gravels boards, adjust number of boards used for desired height. (2 boards = approx 1ft in height)

RECYCLED MATERIALS SPLINTER FREE BRITISH DESIGN ANTI-SLIP
100% QUALITY INSPECTED LOW MAINTAENANCE FIRE-RESISTANT OPTIONS

SUBFRAME • DECKING
FENCING • GATES • BALUSTRADE

Ask for our FSC-certified products
FSC® C007915